


Blyth Enterprises - Footmaster Casters - GDR Range - Specifications



GDR-60-F-NYN

- ▶ Load Capacity 250 kg
- ▶ Recommended Load / 4pcs 500 kg
- ▶ Temperature Range -10 ~ 90 °C

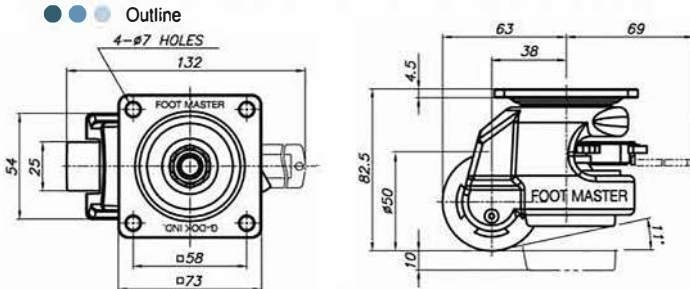


Materials

Names	Basic materials	Optional materials
Plate	Pressed steel / khaki	-
Frame	Aluminum / Ivory	Aluminum / Black
Handle	Ratchet	-
Pad	NBR / Black	NBR / Gray Antistatic NBR / Black Polyurethane / Natural Antistatic Polyurethane / Natural
Wheel	Nylon 6	Polyurethane
Powder coat & Zinc galvanized		



GDR-60-S-NYN

- ▶ Load Capacity 250 kg
- ▶ Recommended Load / 4pcs 500 kg
- ▶ Temperature Range -10 ~ 90 °C

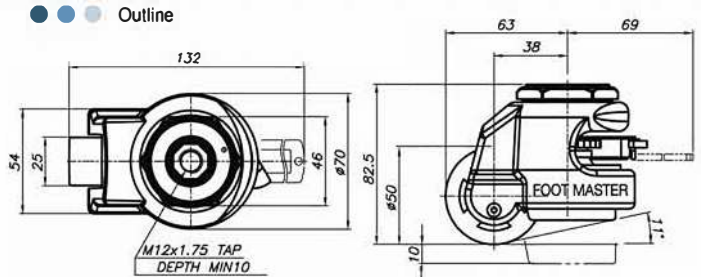


Materials

Names	Basic materials	Optional materials
Plate	Pressed steel / khaki	-
Frame	Aluminum / Ivory	Aluminum / Black
Handle	Ratchet	-
Pad	NBR / Black	NBR / Gray Antistatic NBR / Black Polyurethane / Natural Antistatic Polyurethane / Natural
Wheel	Nylon 6	Polyurethane
Powder coat & Zinc galvanized		



GDR-80-F-NYN

- ▶ Load Capacity 500 kg
- ▶ Recommended Load / 4pcs 1,000 kg
- ▶ Temperature Range -10 ~ 90 °C

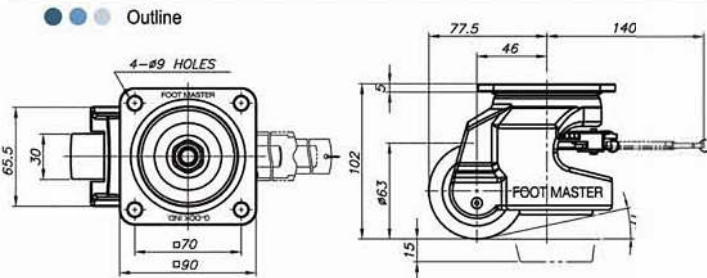


Materials

Names	Basic materials	Optional materials
Plate	Pressed steel / khaki	-
Frame	Aluminum / Ivory	Aluminum / Black
Handle	Ratchet	-
Pad	NBR / Black	NBR / Gray Antistatic NBR / Black Polyurethane / Natural Antistatic Polyurethane / Natural
Wheel	Nylon 6	Polyurethane
Powder coat & Zinc galvanized		



GDR-80-S-NYN

- ▶ Load Capacity 500 kg
- ▶ Recommended Load / 4pcs 1,000 kg
- ▶ Temperature Range -10 ~ 90 °C

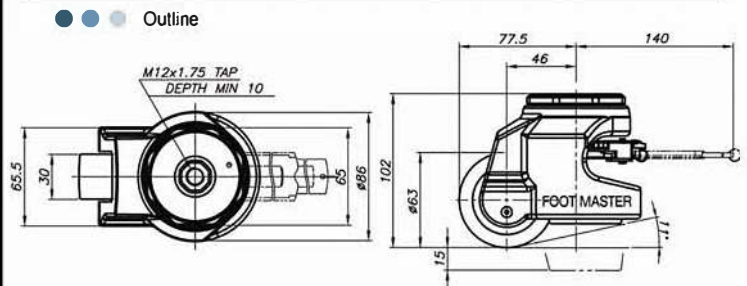

Materials

Names	Basic materials	Optional materials
Plate	Pressed steel / khaki	-
Frame	Aluminum / Ivory	Aluminum / Black
Handle	Ratchet	-
Pad	NBR / Black	NBR / Gray Antistatic NBR / Black Polyurethane / Natural Antistatic Polyurethane / Natural
Wheel	Nylon 6	Polyurethane
Powder coat & Zinc galvanized		